SPECIFICATIONS

Model			RTV-X1130	
Body color			Kubota Orange	
Engine	Make		KUBOTA D1105-E4-UV-2	
	Туре		3-cylinders, 4-cycle, diesel, OHV	
	Displacement	СС	1123	
	Horsepower*	HP (kW)/rpm	24.8 (18.5)@3000	
Fuel tank capacity ℓ			30	
Transmission			Variable hydro transmission (VHT-X)	
Max. Trav	eling speed	km/h	40	
Wheels, drive system			4WD	
Front differential lock			Limited-slip differential	
Rear differential lock			Foot operated differential lock	
Gear selection			Hi-Lo range forward, Neutral, Reverse	
Brakes	Front / Rear		Wet-disk brake	
	Parking brake		Rear wheel, hand operated	
Steering			Hydrostatic power steering	
Suspension	Front / Rear		Dual A-Arms independent suspension	
Dimensions	Length	mm	3925	
	Width	mm	1605	
	Height, overall	mm	2025	
	Front tread centers	mm	1280	
	Rear tread centers	mm	1280	
	Wheelbase	mm	2495	
	Ground clearance front/rear	mm	293 / 257	
	Turning radius	m	5.2	
Towing capacity kg		kg	590	
Payload capacity kg		kg	754	
Curb weig	ht	kg	1060	
Cargo bed	Width	mm	1384	
	Length	mm	1837	
	Depth	mm	294	
	Volume	m³	0.74	
	Bed height (no load)	mm	924	
	Load capacity	kg	550	
	ProKonvert		Standard (Foldable/Removable Side Panel with Tool-less Flatbed Conversion)	
Tires	Front		25×10×12 HDWS, 6-PLY	
	Rear		25×10×12 HDWS, 6-PLY	
Wheels			Steel	
Front Guard			Standard Front Guard	
Hydraulic bed lift			Standard	
Spray-on Bed Liner				

The company reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for Commonwealth of Australia and New Zealand only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured. For display purposes, the previous model's photographs may be used on this brochure.

Kubota Australia Pty Ltd

Web Site: http://www.kubota.com.au

25-29 Permas Way, Truganina VIC, 3029 Australia Freecall: 1800-334-653 Email: sales@kubota.com.au

Kubota New Zealand Limited

433 Rangitikei Street, Cloverlea, Palmerston North, 4412 New Zealand Freecall: 0800-582-682 Email: sales@kubota.com.au

Web Site: http://www.kubota.co.nz

©2023 Kubota Corporation

KUBOTA 4WD DIESEL UTILITY VEHICLE

For Earth, For Life Kubota


RIVEXTISO



BUILT TO OUTWORK



TOUGH & DEPENDABLE

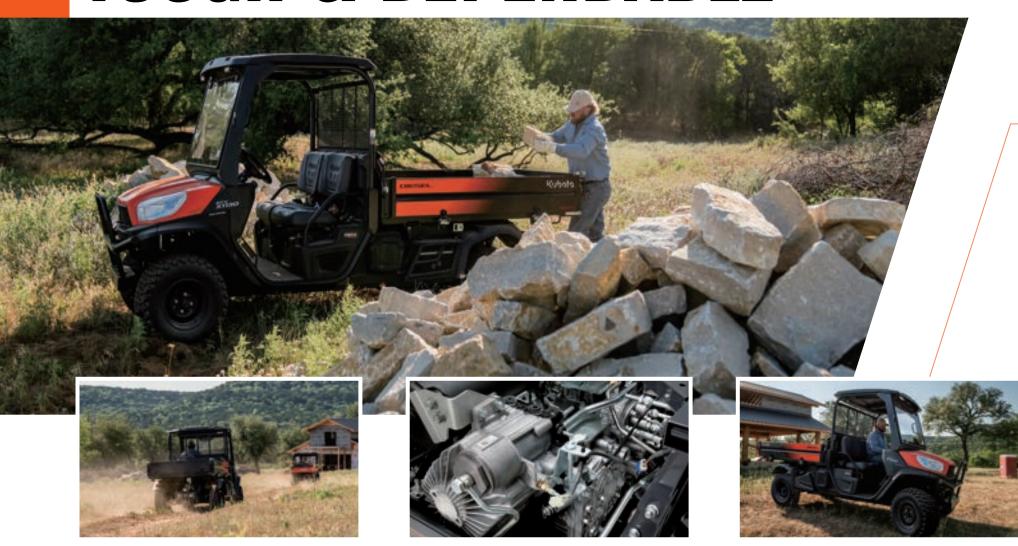

Full Steel Frame/CV Joint Guards

The high-rigidity steel frame isolates the occupants from noise, vibrations, and harshness. With structural strength that few in the industry can match, this durable frame can take years of punishment from heavy loads and rough terrain*.

*See owner's manual for details.

VHT-X (Variable Hydraulic Transmission)

Kubota's VHT-X provides exceptional performance on various terrain with smooth and powerful acceleration. Low-speed driving is made exceptional through smooth throttle control, great traction and maneuverability with or without loads.

Wet Disk Brakes

The RTV-X series uses multi-disk wet brakes which provide long brake life. You'll also feel more secure, especially when traveling down long inclines, knowing that dynamic braking is helping to provide additional braking power and greater driving control.

POWER YOUR PRODUCTIVITY



6ft Long Cargo Bed

It's not enough to get you there and back. You need to get your stuff there and back as well. This heavy-duty 6ft steel cargo bed can do that for you, carrying more than a half-ton (550kg) of tools, firewood, gear, supplies...whatever you need to haul from here to there and back again.

Standard Hydraulic Dump Bed

Dump sand, gravel, turf, or just about anything you can think of, from the RTV-X1130's whopping, 0.74 m³ capacity cargo bed. Cargo that could take significant physical strength and time to unload can now be dumped with little effort in mere seconds.

Height Adjustable Suspension

Regardless of the terrain or load, independent suspension on all four wheels helps to ensure an exceptional ride. Kubota's Extra Duty IRS (Independent Rear Suspension) technology is durable and powers your productivity.

CAPABILITY RE-IMAGINED

Kubota Prokonvert Cargo Bed



Tool-less Flatbed Conversion

Full Steel Cargo with Spray-on Bed Liner

GEAR UP AND CUSTOMIZE YOUR MACHINE



Speak to your local dealer about the full range of accessories available for the RTV-X1130.